

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 455 108 A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **91106537.3**

(51) Int. Cl.<sup>5</sup>: **H04Q 11/00**

(22) Date of filing: **23.04.91**

(30) Priority: **27.04.90 JP 109996/90**

(43) Date of publication of application:  
**06.11.91 Bulletin 91/45**

(84) Designated Contracting States:  
**DE GB**

(71) Applicant: **HITACHI, LTD.**  
**6, Kanda Surugadai 4-chome**  
**Chiyoda-ku, Tokyo 100(JP)**


(72) Inventor: **Takahashi, Yasushi**  
**398-3, Uratakaomachi**  
**Hachioji-shi(JP)**

(74) Representative: **Strehl, Schübel-Hopf,**  
**Groening**  
**Maximilianstrasse 54 Postfach 22 14 55**  
**W-8000 München 22(DE)**

(54) **Coherent transmission method, crossconnect apparatus and switching apparatus.**

(57) A crossconnect unit, comprising: a unit for inputting a plurality of coherent signals having a sub-signal added to a main signal (24) after said sub-signal has been modulated by one of a group of modulation methods including a frequency modulation, a phase modulation, an intensity modulation and an amplitude modulation which are different from those applied to said main signal; a wavelength

filter (1) for extracting a desired signal from said plurality of coherent signals; a destination decoder (3) for detecting said sub-signal from said extracted signal and extracting destination information (22); and means (4) for setting a signal path for said extracted signal based on said destination information.

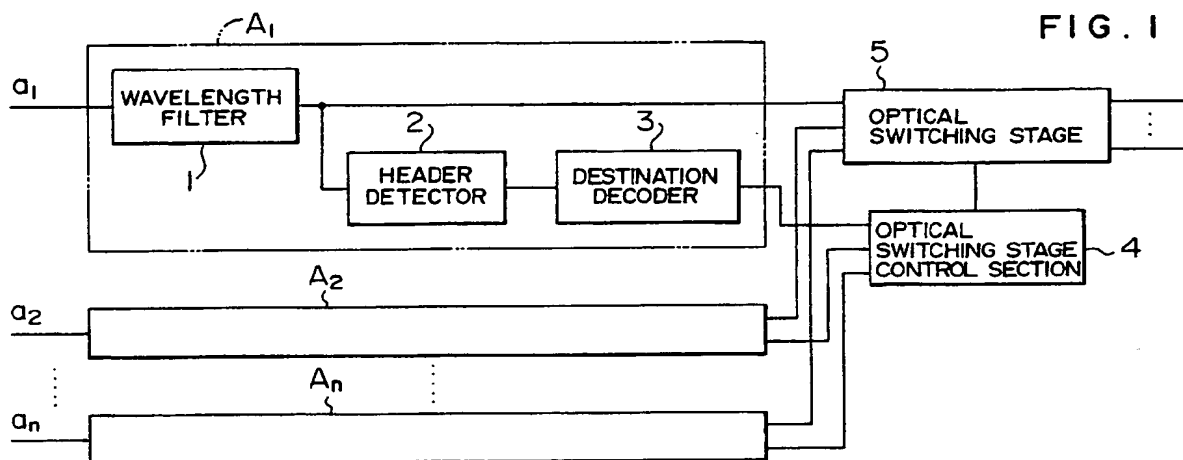

EP 0 455 108 A2

## BACKGROUND OF THE INVENTION

The present invention relates to coherent optical transmission and, more particularly, to an optical transmission format which facilitates switching and crossconnect processings within a communication system.

According to the conventional intensity modulation optical transmission system, wavelength of a beam does not have an important effect. For example, a change of a wavelength during a transmission period has caused no problem so long as the change is within the range of wavelength reaching a sensitivity range of a receiver. However, according to the coherent optical transmission method, a change of a wavelength in transmission brings about a serious interference in performing normal communication, such as interchannel crosstalks or an erroneous selection of a channel, because optical signals of many wavelengths are multiplexed and transmitted in the coherent optical transmission system. Therefore, unnecessary change of a wavelength should be avoided when a switching processing is carried out in a transmission system. In other words, there may occur a problem unless a wavelength is correctly converted when it becomes necessary to rewrite control information following a switching processing. In order to solve the above problem, it is necessary to arrange such that all the information essential for a switching operation such as attributes of the signal, destinations, etc. is being carried as a sub-signal and the switching operation is carried on based on this sub-signal, with a main signal kept unchanged.

There has been no case that a sub-signal is superposed on a main signal to achieve the above-described purpose in the conventional coherent transmission method. In a system using an intensity modulation, a sub-signal superposing method has been proposed, such as the one described in "Design of Lithium Niobate Based Photonic Switching Systems" by W. A. Payne, et al, IEEE Comm. Magazine, vol. 25, May, 1987, pp. 37-41.

If the above method of using the same modulation system for both the main signal and the sub-signal is directly applied to the coherent transmission method, it becomes necessary to carry out coherent decoding each time when a processing is carried out. Since fine tuning is necessary in stabilizing the wavelength of a receiving signal, coherent decoding will require a complicated structure of the receiver. There is also a risk that a wavelength of the receiving signal is deviated from a correct range, making it difficult to materialize a practical application of the system.

## SUMMARY OF THE INVENTION

It is an object of the present invention to provide a coherent transmission method, a crossconnect unit and a switching unit which solve the above problems.

The above-described problems can be solved by differentiating the modulation system between the main signal and the sub-signal.

For example, when it is assumed that the main signal is frequency modulated, the sub-signal is intensity modulated and the sub-signal is transmitted by power of two to three times larger than that for the main signal, then it is possible to discriminate the header of a receiving signal by a simple look at the level of the receiving signal.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an overall configuration diagram of a first embodiment of the present invention;

Figs. 2A, 2B, 2C are signal formats of the first embodiment;

Fig. 3 is a configuration diagram of a second embodiment of the present invention;

Fig. 4 is a configuration diagram of an optical receiver in the second embodiment;

Figs. 5A, 5B, 5C are configuration diagrams of an optical receiver in a third embodiment of the present invention;

Fig. 6 is a signal format in the second and third embodiments;

Fig. 7 is a system configuration diagram in a fourth embodiment of the present invention; and Figs. 8A, 8B, 8C are transmission formats of a wave-length selection signal in the fourth embodiment.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

One embodiment of the present invention will be explained below in detail with reference to drawings.

Fig. 1 shows an overall configuration of an example of the system in which the present invention is applied to the crossconnect unit. In Fig. 1, blocks  $A_1$  to  $A_n$  have the identical structures and wavelength multiple beam inputs  $a_1$  to  $a_n$  are divided into individual waveforms by a wavelength filter 1 at an input port. A header detector 2 detects a header position of an input cell and transmits a signal to a destination decoder 3. The destination decoder 3 knows a position of destination information from this signal and extracts the destination information. Destination information after having been decoded is transmitted to an optical switching stage control section 4 and is used for setting a path of the optical switching stage 5. In this embodiment, the optical switching stage 5 is struc-

tured by an optical space switch.

Fig. 2A shows a format of an input optical signal. An intensity modulation signal is used as a signal 21 for showing a cell header position. This signal 21 requires electric power which is about double the size of the power required for a main signal 24. The header position detector 2 can discriminate a header position by checking only an input level. Destination signal 22 is similarly coded and intensity modulated, added next to the signal 21 showing a cell header position. A dummy signal 23 next to the destination signal 22 is a guard time for preventing an input signal from being dropped when the optical switching stage 5 is replaced. The destination decoder 3 transmits a destination signal 22 shown in Fig. 2B to the optical switching stage control section 4 after decoding the destination, and the optical switching stage control section 4 outputs a path change-over signal 25 shown in Fig. 2C to the optical switching stage 5, to set a path. In this case, the guard time mentioned above is set to be longer than the delay time of the setting of a path and the switching time of the optical switching stage 5 so that the rearrangement time of the optical switching stage 5 can be accommodated within the guard time.

With the above-described arrangement of the present embodiment, the configuration of the input port can be simplified without causing any change in the wavelength of the main signal 24.

Fig. 3 shows the system configuration of the second embodiment. According to this embodiment, a transmitting station transmits signals for specifying wavelengths of signals to be received by receiving stations by multiplexing wavelengths of the signals, and the receiving stations decode signals to be received by each station based on the information of the designated wavelengths. According to the conventional method, a transmitting station selects signals to be transmitted to individual receiving stations and transmits these signals by allocating these signals so that each receiving station receives only a signal which is destined to the concerned station. This is the so-called crossconnect method, which requires switching of transmission signals and thus incurs an increase in the quantity of hardware of a crossconnect unit 40 at the transmitting station. In the mean time, when all the wavelength multiplexed signals are to be distributed to each receiving station, each receiving station needs to have a control system for deciding whether each of the signals has been destined to the own station or not and receiving a signal if the decision is such that the signal is destined to the own station. This decision needs to be taken at high speed. However, it is difficult to realize this high-speed logical circuit and, mainly for this reason, a processing time cannot be reduced. In order

to, solve the above problems, the present embodiment has an object of simplifying the crossconnect unit of the transmitting station and communication control of the receiving station. A crossconnect unit 40 at the transmitting station decides a destination of a transmitting signal. In other words, the crossconnect unit 40 decides wavelength of signals to be received by respective receiving stations. This information is collected for each receiving station as channel designation information 41, and the result is transmitted to each receiving station by using optical transmitters 42-1 to 42-4 having wavelengths separate from the wavelengths for transmitting transmission signals. In other words, as shown in Fig. 3, the same optical signal is transmitted from a transmitting station 10 to a plurality of receiving station 11-1 to 11-n in wavelengths of  $\lambda_1$  to  $\lambda_4$ . At the same time, information of the wavelength to be selected by each receiving station is transmitted to respective receiving stations in a wavelength of  $\lambda_5$ . Each receiving station selectively receives only an optical signal of the wavelength to be received based on the channel designation information. By having the above arrangement, the conventional crossconnect function can be realized.

Fig. 4 shows the configuration of the optical receiver at a receiving station. A wavelength filter 12 separates the information of the wavelength (wavelength  $\lambda_5$ ) to be selected from the optical signals having the wavelengths  $\lambda_1$  to  $\lambda_4$ . Based on the information of the wavelengths to be selected (that is, in the order of  $\lambda_2$ ,  $\lambda_1$  and  $\lambda_3$  in this example), the wavelength of a local oscillator 13 is set and a signal of a required waveform is decoded by a coherent receiver 14. In this case, information of the wavelength to be selected is synchronous with the cell of the receiving signal and the wavelength of a local oscillator 13 varies for each cell. However, it takes time for the wavelength of the local oscillator 13 to stabilize. Dummy data included in the receiving signal is used to stabilize the wavelength.

Figs. 5A to 5C show signal formats in the present embodiment. Among these figures, Figs 5A and 5B show frame formats of transmission signals. Dummy signals in this case have the same contents as those of the dummy signals shown in Fig. 2. Fig. 5C shows a transmission frame of the wavelength  $\lambda_5$  for transmitting channel designation information. Information to be received is designated for each frame cycle of each transmission signal. In the present examples, it is designated that the signal of  $\lambda_2$  is received first and then the signal of  $\lambda_1$  is received, followed by the signal of  $\lambda_3$ .

According to the present embodiment, it is not necessary to decide whether a signal is destined to

own station or not based on destination information included in a main signal or a sub-signal. Therefore, it is possible to make a quick decision.

Fig. 6 shows a configuration of the optical receiver in the third embodiment of the present invention. The overall structure is the same as that in Fig. 3. In the present embodiment, a variable wavelength filter 15 is used instead of a local oscillator at the receiving station. A wavelength filter 12 separates the information of the wavelength (wavelength  $\lambda_5$ ) to be separated from the optical signals having the wavelengths  $\lambda_1$  to  $\lambda_4$ . Based on the information of the wavelength to be selected, a control section 16 sets a selected wavelength of a variable wavelength filter 15 and decodes a signal of the required wavelength by a coherent receiver 14. The signal format is the same as that in Fig. 5.

Fig. 7 shows an embodiment in which the network has a ring shape. As shown in Fig. 7, a master mode 30 and modes 1 to 3 are connected to the ring network respectively. The ring network has the same function as that of the embodiment shown in Fig. 3. However, because of the ring shape of the network, the network transmits the information of the wavelength to be selected by multiplexing the information as shown in Figs. 8A to 8C.

Fig. 8A shows a transmission signal frame which has the same structure as that of Fig. 5A. Fig. 8B shows signal frames for transmitting channel designation information in the present embodiment. In the present example, the nodes 1 to 3 receive signals. All the channel designation information shown in Fig. 8C is transmitted to the signal frames shown in Fig. 8B by time-sharing multiplexing the information. In other words, in the first frame of the transmission signal shown in Fig. 8A, the node 1 should select a waveform 3, the node 3 should select a waveform 6 and the node 3 should select a waveform 3. In the first frame of the selection signal shown in Fig. 8B, information to be received by the nodes 1, 2 and 3 is multiplexed in the sequence of the nodes as the waveforms to be selected (in this case, the wavelength 3, the wavelength 6 and the wavelength 3). Each node extracts the channel designation information corresponding to each own node from the frame of the selection signal and selects a wavelength from the transmission signal based on the extracted channel designation information. A wavelength is selected by the receiver having the structure shown in Fig. 4 or Fig. 6.

According to the present invention, it is possible to carry out a crossconnect processing or the like without changing the wavelength of the main signal.

## Claims

1. A coherent transmission method characterized in that, in a coherent transmission, a sub-signal is added to a main signal after said sub-signal has been modulated by one of a group of modulation methods including a frequency modulation, a phase modulation, an intensity modulation and an amplitude modulation which are different from those applied to said main signal.
2. A coherent transmission method according to Claim 1, wherein said sub-signal comprises as least one of an optical signal frame, cell synchronization data, a guard time (23) for changing over an optical switch, a guard time for establishing an optical frequency synchronization and control information necessary for crossconnect or switching.
3. A crossconnect unit, comprising:
  - means for inputting a plurality of coherent signals having a sub-signal added to a main signal (24) after said sub-signal having been modulated by one of a group of modulation methods including a frequency modulation, a phase modulation, an intensity modulation and an amplitude modulation which are different from those applied to said main signal;
  - a wavelength filter (1) for extracting a desired signal from said plurality of coherent signals;
  - a destination decoder (3) for detecting said sub-signal from said extracted signal and extracting destination information (22); and
  - means (4) for setting a signal path for said extracted signal based on said destination information.
4. A coherent signal crossconnect method comprising the steps of:
  - inputting an optical signals that have been wavelength-multiplexed with a plurality of coherent signals;
  - detecting synchronization data for said input optical signals;
  - matching phases of said plurality of optical inputs; and
  - changing connection path at a guard time in said coherent signals.
5. A coherent signal crossconnect unit (40), comprising:
  - means (12) for separating optical signal inputs by wavelength, said optical signals being the ones after having been wavelength-multiplexed with a plurality of coherent signals

having a sub-signal added to a main signal after said sub-signal has been modulated by a modulation method different from a modulation method applied to said main signal; and

means for connecting said separated signals to a predetermined output port.

6. A coherent signal crossconnect unit (40) according to Claim 5, wherein wavelengths are converted only when a plurality of signals having the same wavelength are to be outputted to a same output port.

7. A coherent signal crossconnect unit (40) according to Claim 3, wherein said coherent signal crossconnect unit comprising:

means for distributing optical signal inputs that have been wavelength multiplexed to all output ports; and

means for eliminating signals of wavelengths that are not necessary for the output side.

8. A coherent signal crossconnect unit (40), comprising:

means for separating optical signal inputs by wavelength, said optical signals being the ones after having been wavelength-multiplexed with a plurality of coherent signals having a sub-signal added to a main signal after said sub-signal has been modulated by a modulation method different from a modulation method applied to said main signal;

means for converting said optical signals separated by wavelength into optical signals of a plurality of wavelengths; and

means for connecting said wavelength-converted optical signals to predetermined optical ports.

9. A coherent signal crossconnect unit (40) according to Claim 8, wherein said coherent signal crossconnect unit divides cells, converts said divided cells into optical signals having specific two wavelengths, and connects optical signals in said divided data unit.

10. A coherent transmission method characterized in that a transmitting station (42) designates information of a wavelength which should be received by a receiving station (11) in a cell or frame unit, and transmits said information to said receiving station by using an optical signal having a wavelength separate from a wavelength for transmitting a main signal.

11. A coherent transmission method characterized in that selection channel designation signals

(41) for a plurality of stations are multiplexed, and these signals are transmitted to receiving stations (11) by using optical signals having wavelengths different from a wavelength for transmitting a main signal.

12. A coherent signal switching unit, comprising:

means for modulating a sub-signal by a modulation method different from a modulation method applied to a main signal and for adding said sub-signal after a modulation to said main signal;

means for detecting said sub-signal; and

means for rewriting said sub-signal.

13. A coherent signal switching method comprising the steps of:

inputting an optical signals which have been wavelength-multiplexed with a plurality of coherent signals are inputted;

detecting synchronization data for said input optical signals;

matching phases of said plurality of optical input signals; and

changing a connection path at a guard time in said coherent signals.

14. A coherent signal switching unit according to Claim 12, wherein said coherent signal switching unit further comprises:

means (12) for separating wavelength-multiplexed optical signal inputs by wavelength; and

means for connecting said separated signals to predetermined output ports.

15. A coherent signal switching unit according to Claim 12, wherein wavelengths are converted only when a plurality of signals having the same wavelength are to be outputted to a same output port.

16. A coherent signal switching unit according to Claim 12, wherein said coherent signal switching unit further includes:

means for distributing wavelength-multiplexed optical signal inputs to all the output ports; and

means for eliminating signals of wavelengths which are not necessary at the output side.

17. A coherent signal switching unit according to Claim 12, wherein said coherent signal switching unit further comprises:

means for separating wavelength-multiplexed optical signal inputs by wavelength;

means for converting said separated-

wavelength optical signals into optical signals of a plurality of wavelengths; and

means for connecting said optical signals of converted wavelengths to predetermined output ports.

5

18. A coherent signal switching unit according to Claim 17, characterized in that cells are divided; said cells are converted into optical signals of specific two wavelengths; and optical signals are connected in divided data unit.

10

19. A coherent transmission signal format characterized in that a sub-signal is added to a main signal after said sub-signal has been modulated by one of a group of modulation methods including a frequency modulation, a phase modulation, an intensity modulation and an amplitude modulation which are different from those applied to said main signal.

15

20

25

30

35

40

45

50

55




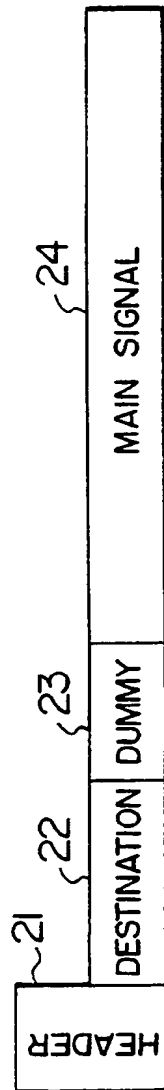
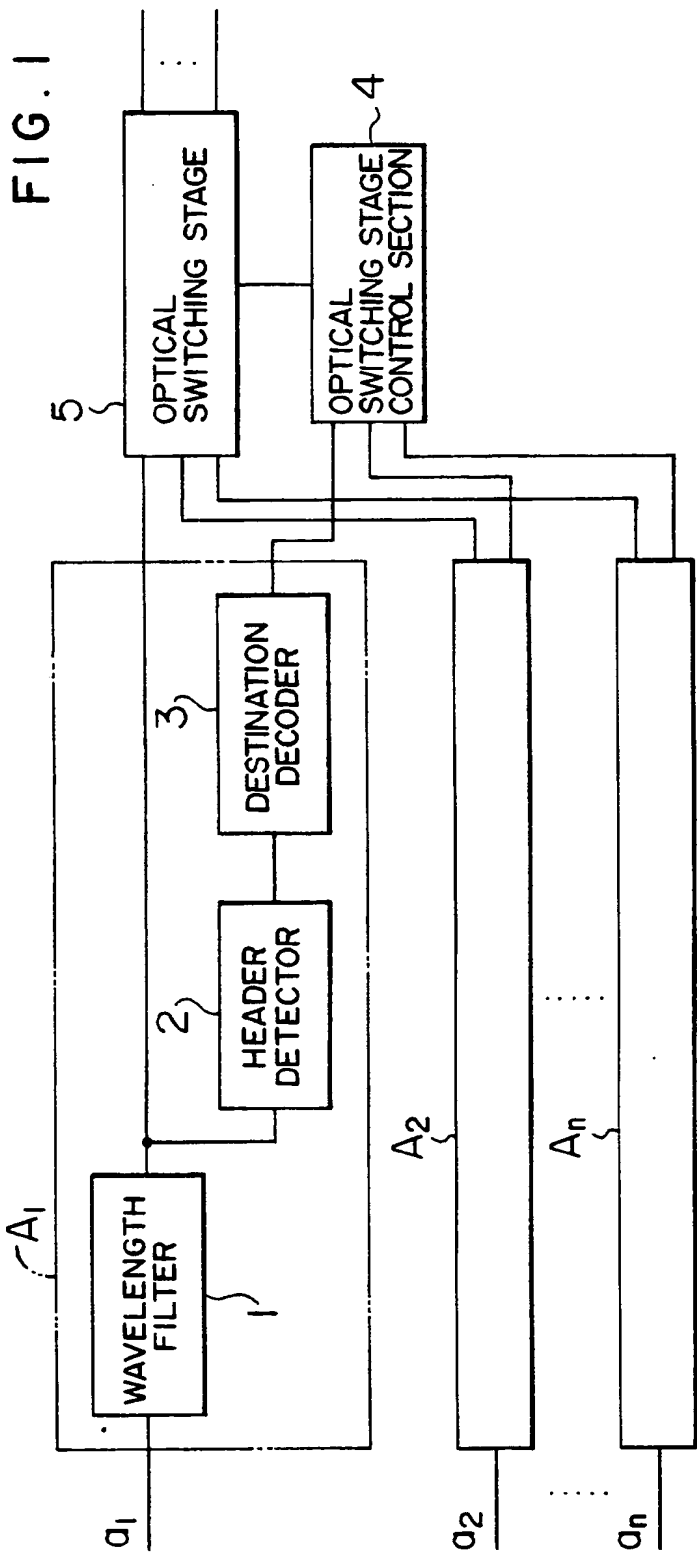


FIG. 3

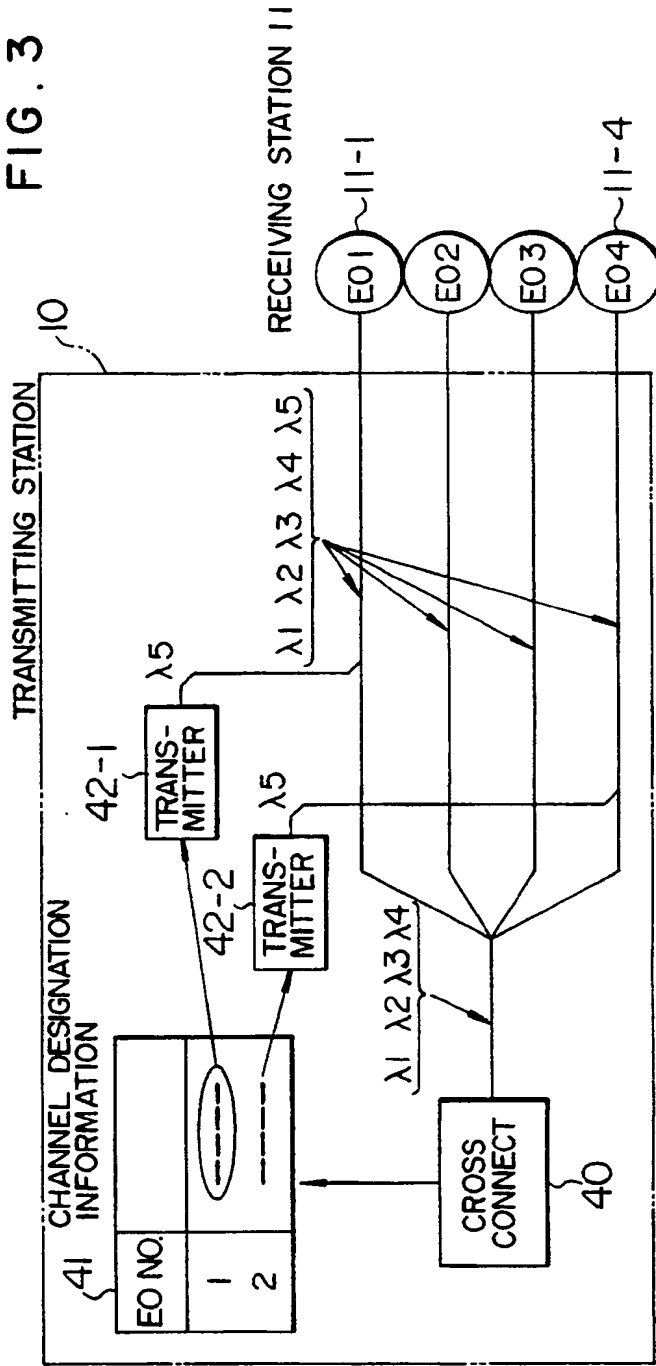
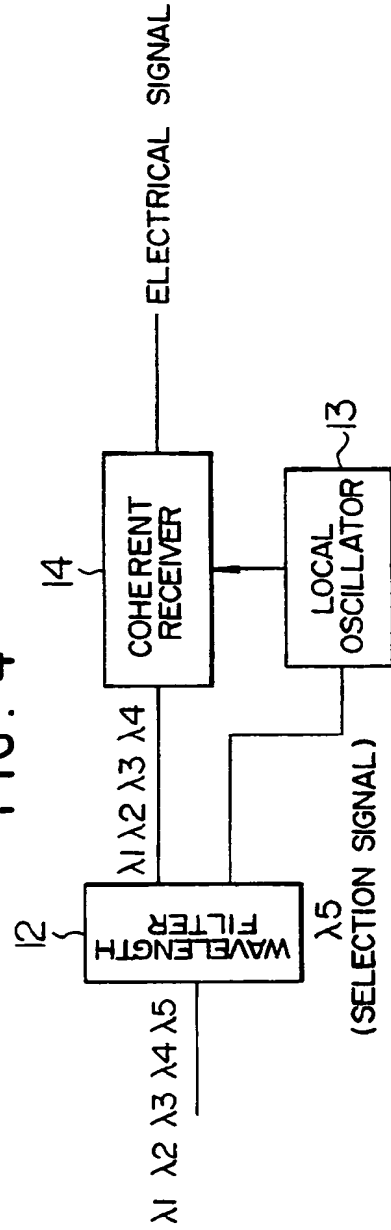


FIG. 4








FIG. 6

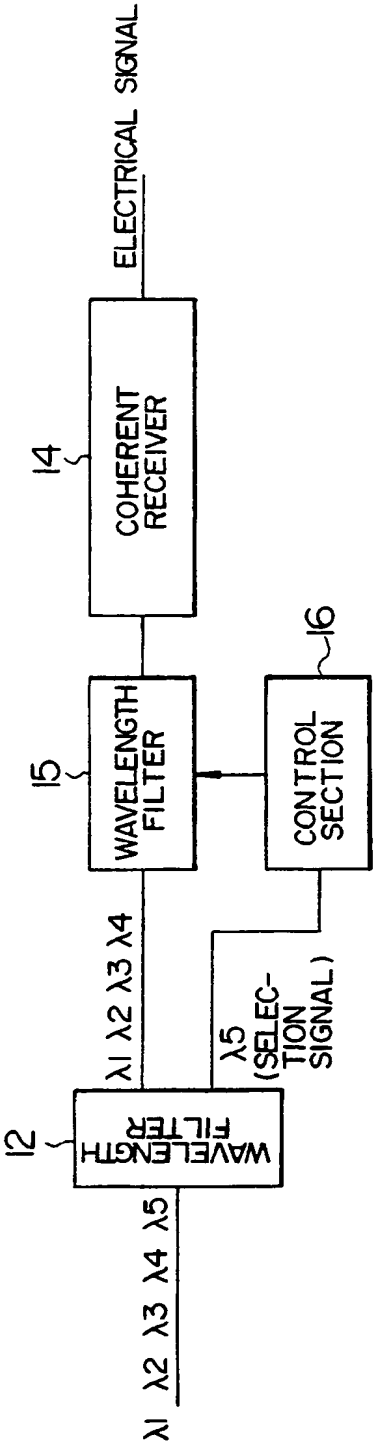


FIG. 7

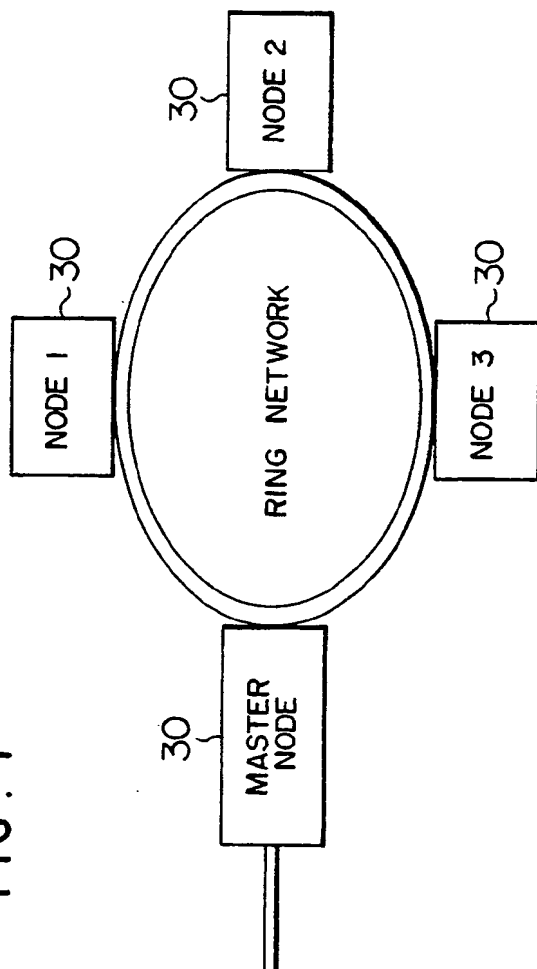


FIG. 8A



FIG. 8B



FIG. 8C

NODE	WAVELENGTH
1	3
2	6
3	3



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 455 108 A3**

12

## EUROPEAN PATENT APPLICATION

21 Application number: **91106537.3**

51 Int. Cl.<sup>5</sup>: **H04Q 11/00**

22 Date of filing: **23.04.91**

30 Priority: **27.04.90 JP 109996/90**

43 Date of publication of application:  
**06.11.91 Bulletin 91/45**

84 Designated Contracting States:  
**DE GB**

98 Date of deferred publication of the search report:  
**04.08.93 Bulletin 93/31**

71 Applicant: **HITACHI, LTD.**  
**6, Kanda Surugadai 4-chome**  
**Chiyoda-ku, Tokyo 100(JP)**


72 Inventor: **Takahashi, Yasushi**  
**398-3, Uratakaomachi**  
**Hachioji-shi(JP)**

74 Representative: **Strehl, Schübel-Hopf,**  
**Groening**  
**Maximilianstrasse 54 Postfach 22 14 55**  
**W-8000 München 22 (DE)**

54 **Coherent transmission method, crossconnect apparatus and switching apparatus.**

57 A crossconnect unit, comprising: a unit for inputting a plurality of coherent signals having a sub-signal added to a main signal (24) after said sub-signal has been modulated by one of a group of modulation methods including a frequency modulation, a phase modulation, an intensity modulation and an amplitude modulation which are different from those applied to said main signal; a wavelength

filter (1) for extracting a desired signal from said plurality of coherent signals; a destination decoder (3) for detecting said sub-signal from said extracted signal and extracting destination information (22); and means (4) for setting a signal path for said extracted signal based on said destination information.

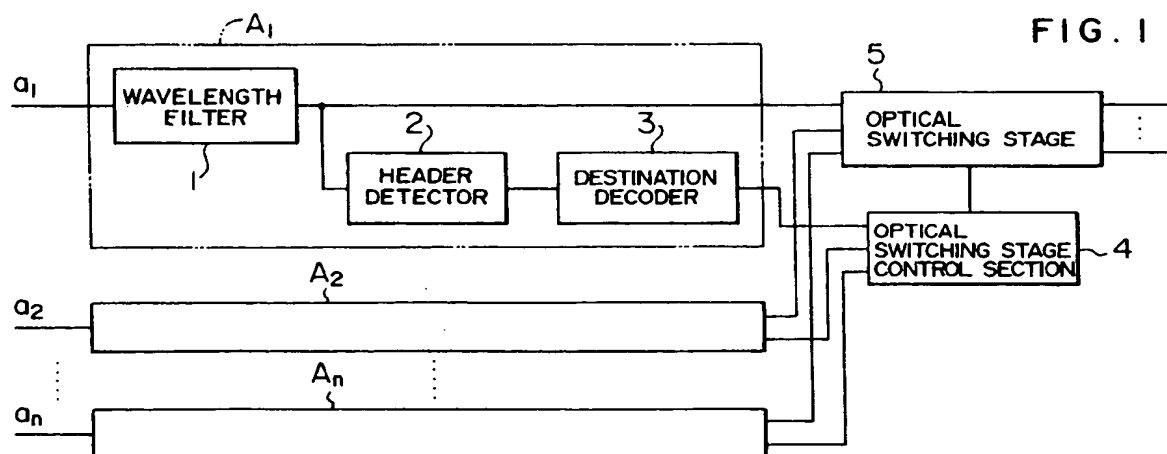

EP 0 455 108 A3



European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

which under Rule 45 of the European Patent Convention  
shall be considered, for the purposes of subsequent  
proceedings, as the European search report

Application Number

EP 91 10 6537  
Page 1

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
X Y  A	DE-A-3 221 942 (SIEMENS) * the whole document *	1,2,12 3,5,7,8, 14,16 6,9,15, 17,18	H04Q11/00
X	--- JOURNAL OF LIGHTWAVE TECHNOLOGY vol. 7, no. 6, June 1989, NEW YORK US pages 983 - 989 , XP000054898 P.A. PERRIER ET AL 'Self Clocked Optical Control of a Self-Routed Photonic Switch' * abstract * * page 983, left column, line 16 - line 38; figures 1,2 *	1,12	
X  Y  A	--- PATENT ABSTRACTS OF JAPAN vol. 10, no. 370 (E-463)(2427) 10 December 1986 & JP-A-16 4 395 ( NEC CORP. ) 25 July 1986 * abstract *  --- -/--	10,11  3,5,7,8, 14,16 6,9,15, 17,18	TECHNICAL FIELDS SEARCHED (Int. Cl. 5)  H04Q

## INCOMPLETE SEARCH

The Search Division considers that the present European patent application does not comply with  
the provisions of the European Patent Convention to such an extent that it is not possible to carry  
out a meaningful search into the state of the art on the basis of some of the claims

Claims searched completely :

Claims searched incompletely :

Claims not searched :

Reason for the limitation of the search:

see sheet C

Place of search  
THE HAGUE

Date of completion of the search  
17 MAY 1993

Examiner  
D.J. O'REILLY

### CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another  
document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or  
after the filing date  
D : document cited in the application  
L : document cited for other reasons

& : member of the same patent family, corresponding  
document



European Patent  
Office

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid,  
namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions.

namely:

See sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid,  
namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims,  
namely claims:



European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

EP 91 10 6537

Page 2

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	PROCEEDINGS OF THE FOURTH TIRRENIA INTERNATIONAL WORKSHOP ON DIGITAL COMMUNICATIONS, 19-23 SEPT. 1989, PAGES 313-323, TIRRENIA IT, XP164004 K.Y. ENG 'Photonic Switching Using Tunable Optical Terminals' * the whole document * ---	-	
A	DE-A-3 211 242 (SIEMENS) * the whole document * ---	-	
X	ELECTRONICS LETTERS vol. 26, no. 2, 18 January 1990, STEVENAGE GB pages 99 - 100, XP104997 Y.TAKAHASHI 'New Retiming and Synchronisation Scheme for Optical ATM Switching Systems' * the whole document * ---	4,13	TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
X	IEEE COMMUNICATIONS MAGAZINE vol. 25, no. 5, May 1987, PISCATAWAY, NJ US pages 56 - 58 J.R. ERICKSON ET AL 'A 1.7 Gigabit-per-Second, Time-Multiplexed Photonic Switching Experiment' * page 57, left column, line 41 - right column, line 44; figures 1-3 * ---	4,13	
A	CONFERENCE RECORD, IEEE GLOBAL TELECOMMUNICATIONS CONFERENCE, 27-30 NOV. 1989, VOL. 3 PAGES 1810-1814, DALLAS US, XP91268 E. AMADA ET AL 'A Photonic Approach to ATM Switching' * page 1811, left column, line 30 - right column, line 8 * * page 1813, left column, line 26 - right column, line 2; figures 2,3 * --- -/--	4,13	

EPO FORM 1503 03.82 (P04E10)





European Patent  
Office

## PARTIAL EUROPEAN SEARCH REPORT

Application Number

EP 91 10 6537

Page 3

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
X	CONFERENCE RECORD, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, 11-14 JUNE 1989, VOL. 1 PAGES 162-170, BOSTON US , XP75456 S.C. LIEW ET AL 'A Broadband Optical Local Network Based on Multiple Wavelengths and Multiple RF Subcarriers' * page 164, left column, line 2 - line 23; figure 6 *  -----	10,11	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)

EPO FORM 1503 03.82 (P04E10)



European Patent  
Office

EP 91 10 6537 -B-

#### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-3,5-9,12,14-18:  
Transmission system using different modulation method
2. Claims 4,13:  
A coherent signal crossconnect switch with guard time
3. Claims 10,11:  
A coherent transmission method with separate signaling channel



EP 91 10 6537

Claim not searched : 19

Reason : Art. 52(2)d in EPC

**THIS PAGE BLANK (USPTO)**